

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number  
WO 2004/065193 A2

(51) International Patent Classification<sup>7</sup>: B62B 7/08

(21) International Application Number:  
PCT/IB2004/000762

(22) International Filing Date: 16 January 2004 (16.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0300535 17 January 2003 (17.01.2003) FR

(71) Applicant (for all designated States except US): ROY-  
ALTY BUGABOO S.A.R.L. [LU/LU]; 46A, Avenue J. F.  
Kennedy, L-1855 Luxembourg (LU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HENRY, Gilles  
[FR/FR]; 4, rue Nationale, F-92100 Boulogne-Billancourt  
(FR).


(74) Agents: BRESSE, Pierre et al.; Bressé-Majerowicz, 3,  
avenue de l'Opera, F-75001 Paris (FR).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: COLLAPSIBLE STRUCTURE SYSTEM

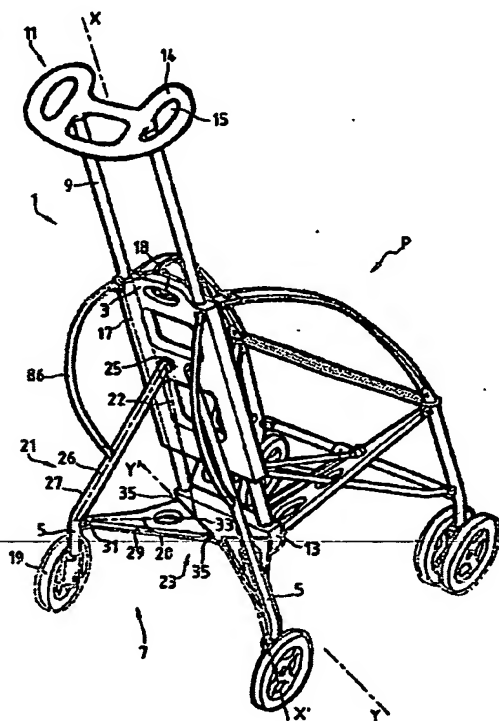

(57) Abstract: This structure comprises an upright (1), a slid-  
ing block (3) sliding on the upright (1) along an axis (XX'),  
and at least a collapsible leg (5) associated with a jointed struc-  
ture (7). This structure comprises, seen according to a direction  
(Y-Y') different from said axis (X-X'), a jointed deployment tri-  
angle (21) having a first side (22) delimited by a first joint (23)  
located on the upright (1) and a second joint (25) located on a  
point of the sliding block (3). The first joint (25) or the second  
joint (23) comprises two points of joint (35) separated accord-  
ing to said direction (Y-Y') so that the side of the deployment  
triangle (21) which is jointed at these two points (35) constitutes  
a rigid guiding triangle (29) defined by these two points (35) and  
by a third joint (31). Application to the collapsible structures  
of children pushchairs.

WO 2004/065193 A2